

GENIEMAT[®] FF25

ROLL-OUT FLOATING FLOORS



PATENTS: US 8,240,430 US 8,556,029 CA 2,500,956 CA 2,503,420

PRODUCT SPECIFICATION

PRODUCT NAME: GenieMat FF25

DESCRIPTION:

Robust dimpled rubber pad made up to 94% recycled rubber content used when superior sound control is required in mechanical rooms, sound studios, home theatres, entertainment venues, medical facilities, exercise, gym, and dance floors, and commercial, industrial, and multifamily housing.

APPLICATION:

Shock absorbing and impact sound reducing pad to be used under screed, light-weight and full-weight concrete, cement board, and **GenieBoard**.

FEATURES AND BENEFITS:

- Significantly increases $L_{n,w}$ and R_w ratings
- Qualifies for LEED[®] points
- No potential mould-producing fibreglass
- Easy to install, rolls out quickly, stays in place, and doesn't need to be adhered or fastened to substrate

DIMENSION:

Rollgood: 1.22 m wide, 4.57 m long

THICKNESS:

nom. 25 mm max.
nom. 14 mm min.

ROLL WEIGHT:

57.2 kg/roll

ROLL AREA:

5.57 m²

GENIEMAT® FF25

ROLL-OUT FLOATING FLOORS



PATENTS: US 8,240,430 US 8,556,029 CA 2,500,956 CA 2,503,420

TECHNICAL DATA

LABORATORY IMPACT INSULATION CLASS (BS EN ISO 10140-3):

GenieMat FF25 tested over 175 mm 5-ply cross laminated timber (CLT) with 100 mm concrete topping, no ceiling, $L_{n,w}$ 60 dB

GenieMat FF25 tested over 140 mm concrete slab with 100 mm concrete topping, no ceiling, $L_{n,w}$ 45 and $\Delta L_{n,w}$ 32 dB as per BS EN ISO 10140-8

GenieMat FF25 tested over 140 mm concrete slab with 60 mm screed, no ceiling, $L_{n,w}$ 47 and $\Delta L_{n,w}$ 30 dB as per BS EN ISO 10140-8

GenieMat FF25 tested over TJI joist with vinyl, **GenieMat RST02**, 40 mm screed, and OSB, ceiling consist of **GenieClip RST** and 2 layers of plasterboard, $L_{n,w}$ 46 dB

DEFLECTION CREEP:

Shall not experience deformation greater than 3% of the total thickness under a load of 700 N for a constant 24 hour period

NATURAL FREQUENCY:

18 Hz at 0.01 MPa load
16 Hz at 0.02 MPa load
15 Hz at 0.1 MPa load

VOC EMISSIONS: (CDPH/EHLB STANDARD METHOD v1.2-2017)


FloorScore certified

BUTADIENE PURITY AND HYDROCARBON IMPURITIES: (ASTM D2593)

None detected

TEMPERATURE STABILITY:

-40°C to +80°C

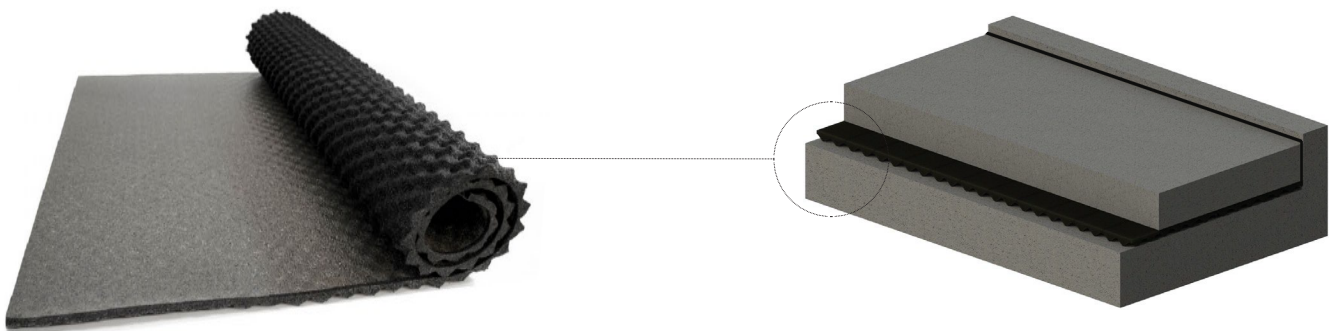



AROUND THE WORLD.

PLITEQ INC.

131 Royal Group Crescent
Vaughan, ON
L4H 1X9 Canada

4211, Yonge Street,
Suite 404, Toronto, ON
M2P 2A9 Canada

2015 Main St,
Vancouver, BC
V5T 3C2 Canada

T.+1 416 449 0049
info@pliteq.com
www.pliteq.com

PLITEQ (DE)

251 Little Falls Drive
Wilmington, DE
19808
United States of America

PLITEQ (AZ)

11701 N. 132nd Drive
Surprise, AZ
85379
United States of America

T.+1 480 805 5560
info@pliteq.com
www.pliteq.com

PLITEQ (UK) LTD.

Office 205, Orega High
Holborn, 16 High Holborn,
London, WC1V 6BX
United Kingdom

T.+44 203 9846444
info@pliteq.co.uk
www.pliteq.co.uk

PLITEQ MEXICO

Calz. Gral. Mariano
Escobedo 476-piso 12
Chapultepec Morales,
Anzures,
Miguel Hidalgo, 11590
Ciudad de México, CDMX
Mexico

T.+52 1 938 164 1551

PLITEQ ASIA PACIFIC PTE LTD.

#19-13, 101 Cecil Street,
Tong Eng Building, 069533
Singapore

T.+65 6813 2017
info@pliteq.sg
www.pliteq.sg

PLITEQ BUILDING MATERIALS TRADING LLC.

European Business Centre
Dubai Investment Park
PO Box 473 512
United Arab Emirates

T. +971 4 567 4944
info@pliteq.ae
www.pliteq.ae

PLITEQ AUSTRALIA PTY LTD.

72 York Street, South
Melbourne, VIC, 3205
Australia

T.+61 3 9018 7696
info@pliteq.com.au
www.pliteq.com.au



© Pliteq Inc. 2025.

®™ Trademarks of Pliteq Inc. The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested application may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications. All listed dimensions are nominal.